

## Horizontal Mount Side Lights

### 1-mile (USCG 1nm) Certified

Use on Sail or Power Driven Vessels Under 12m (39.4 ft.) in Length

Material: Brass or Stainless Steel Top, Polymer Base  
 Finish: Chrome Plated or Polished  
 Dimensions: O.D. Base: 2-3/8", Height: 1-5/8"  
 Screw Size: #4  
 Contacts: Gold Plated  
 Voltage: 12V (Bulb Included)  
 Wattage: 10 watts (each light)  
 Amperage: .80 amps (each light)



Fig. 0963

Finish	Retail Pkg.*	OEM Bulk Pkg.*
Chrome	0963DP0CHR	0963000CHR
Polished SS	0963DP0STS	0963000STS

\*Sold in pairs.



### 1-mile Certified A-16 for replacement use only

Use on Sail or Power Driven Vessels Under 12m (39.4 ft.) in Length

Material: Brass or Stainless Steel, Polymer Base  
 Finish: Chrome Plated or Polished  
 Dimensions: Length: 4-1/4", Width: 2-3/8", Height: 1-1/2"  
 Screw Size: #4  
 Contacts: Gold Plated  
 Voltage: 12V (Bulb Included)  
 Wattage: 10 watts (each light)  
 Amperage: .80 amps (each light)

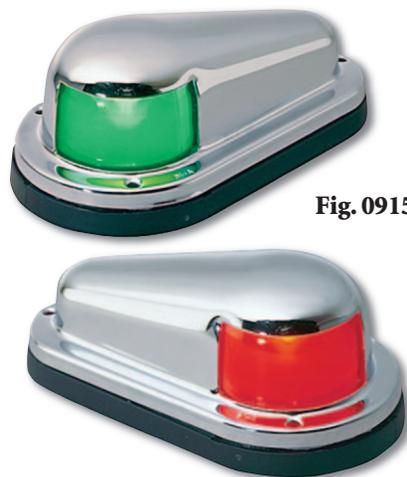


Fig. 0915

Finish	Retail Pkg.*
Chrome	0915DP0CHR
Polished SS	0915DP0STS

\*Sold in pairs.




Note: Fig. 0915 can also be used as 24-volt A.B.Y.C. A-16 certified lights on boats built prior to 11/1/03.

Replace the bulbs provided with Cat. No. 0072DP1CLR 24-volt bulbs. Contact us for 24-volt applications on new construction.

### Spare Parts Information

#### Fig. 0963:

Chrome Brass Green Side Light Only: 0963G00CHR.  
 Chrome Brass Red Side Light Only: 0963R00CHR.  
 Stainless Green Side Light Only: 0963G00STS.  
 Stainless Red Side Light Only: 0963R00STS.  
 Lens Set, Old Style Open Top: 0281DPALNS.  
 Lens Set, New Style Closed Top: 0295DP0LNS.  
 Bulbs: 0071DP0CLR.  
 Base w/Socket Assembly: 0135.

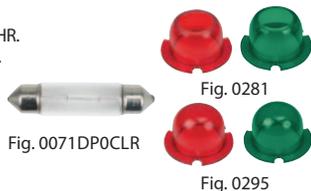

#### Fig. 0915:

Chrome Brass Green Side Light: 0915G00CHR.  
 Chrome Brass Red Side Light: 0915R00CHR.  
 Stainless Green Side Light: 0915G00STS.  
 Stainless Red Side Light: 0915R00STS.  
 Base with Socket Assembly: 0107.  
 Lens Set, Old Style Open Top: 0281DPALNS.  
 Lens Set, New Style Closed Top: 0295DP0LNS.  
 Bulbs: 0071DP0CLR.

