

The above lights are not designed for navigational use
and are not for use below the waterline.

MOUNTING INFORMATION

Read all instructions before proceeding.

- 1). These instructions show the orientation of the light after the proper location has been determined.
- 2). These lights are supplied with the proper circuit for operation on a nominal 12 volt system.
- 3). These lights contain no user serviceable components.
- 4). Draw a 6 inch long reference line through the center of the selected mounting location.
- 5). Cut out the mounting template to the right. Tape it on the mounting surface such that the reference line (drawn above) passes through the exact center of the template.
- 6). Drill three holes through the template as indicated for the #8 mounting screws.
- 7). Drill a 2-1/4 inch hole to accommodate the body as indicated.
- 8). Wiring should be done by a qualified marine electrician. Attach supply connections to the light, making sure to wire in accordance with both A.B.Y.C. Standard E-9* and U.S. Coast Guard Safety Standards for Boat Electrical Systems (33CFR 183)* Observe polarity.
- 9). Attach the light to the mounting surface using #8 mounting screws.

* The above referenced standards can be obtained from:

- | | |
|---|--|
| (1). American Boat & Yacht Council, Inc.
613 Third Street, Suite 10
Annapolis, MD 21403 | (2). U.S. Coast Guard
Washington, D.C. 20593
(or your local C.G. office) |
|---|--|


10/08
0202INS1

Perko, Inc.
16490 N.W. 13th Avenue
Miami, FL 33169-5707
www.perko.com

MOUNTING TEMPLATE 1


0202 Series L.E.D.

DRILL 2-1/4" INCH HOLE

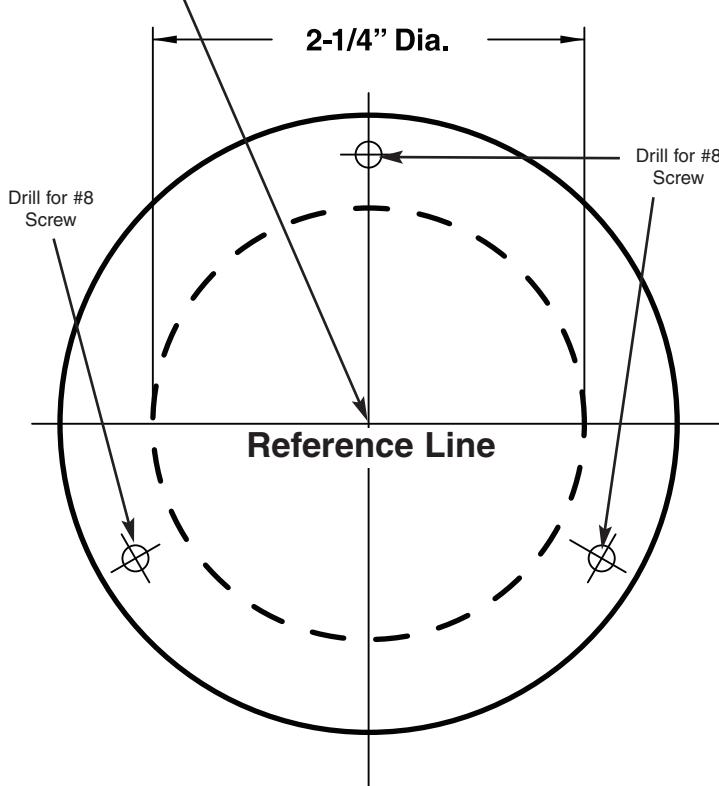**MOUNTING TEMPLATE 2**

0202 Series L.E.D.

DRILL 2-1/4" INCH HOLE

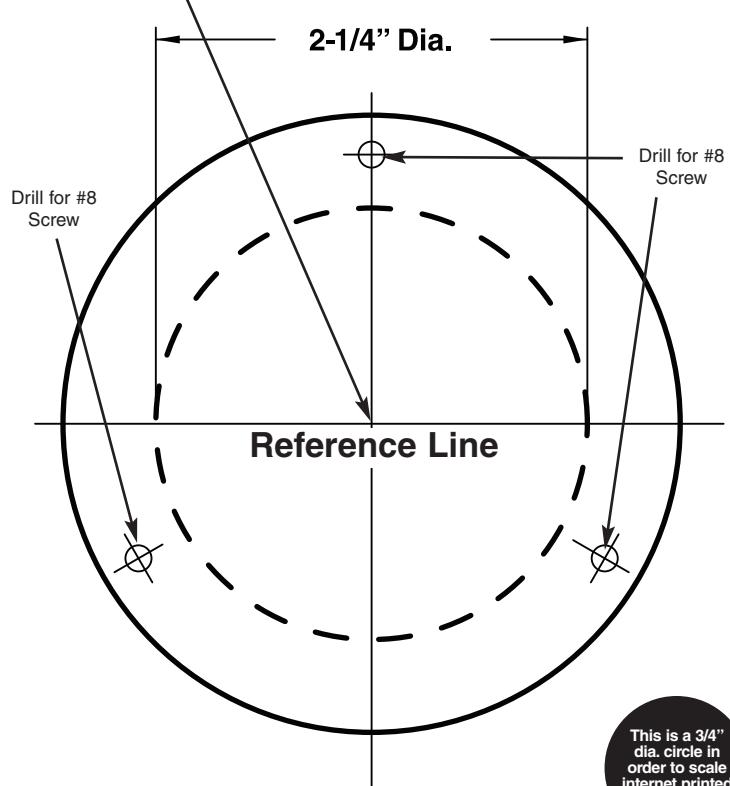

This is a 3/4" dia. circle in
order to scale
internet printed
templates