



Thank you for purchasing the most advanced waste tank vent filter available.

Part No. 0686DP0KIT / 0686000KIT Odor Eater™

WASTE TANK VENT FILTER OPERATING INSTRUCTIONS

Note: For 5/8" or 3/4" vent line. Hose clamps not included.

Choose your location:

1. The Odor Eater must be positioned to hull side horizontally and installed above the top of the holding tank along the vent line. Select a location that is both accessible for maintenance and allows proper airflow through the vent line. Ensure that the mounting surface is flat and sturdy enough to hold the Odor Eater™.
2. Holding Tank Mount - Some holding tanks will have a vent filter attached to the tank. If replacing a filter located on the tank, you will need to first attach the hose adapter to the quick connect. Assemble the quick connects on to the cartridge and slide the adapter of one side into the grommet/seal on the tank. Attach the hose of the other quick connect to the existing vent line. Secure on tank using existing tank straps.


Installing the Odor Eater™ with Mounting Bracket on Bulkhead:

1. Secure the mounting bracket strap to the two mounting clamps.
2. Position the bracket on the mounting surface in the location selected above. Ensure it is horizontal.
3. Using the bracket as a guide, mark the position of the screw holes, drill pilot holes, align bracket, and secure with #8 screws. Tighten the screws until the bracket is firmly secured, but avoid over tightening to prevent damage.
4. Align the Odor Eater™ unit with the two clamp ends of the mounting bracket. Press the unit into place until you hear an audible click, ensuring that both ends are securely fastened to the mounting bracket. Ensure that it is firmly locked into place and that the mounting bracket is secure.
5. Use a knife or scissors to cut the vent hose for the chosen location, if needed. Make sure the cut is clean and straight.
6. Attach the black quick connectors to the white hose adapters. Install the hose adapters into each end of the vent line hose and secure with hose clamps.
7. "Snap" black quick connectors onto each end of the Odor Eater™. Ensure each connection clicks securely in place.
8. Double-check all connections to ensure they are secure and there are no leaks.
9. Regularly inspect the hose connections and Odor Eater™ for signs of wear or damage.

The Odor Eater™ cartridge should be replaced periodically, typically every 12 months, depending on usage.

Replacing the Odor Eater™ Filter Cartridge:


1. Disconnect cartridge from the vent line by pressing on the tops of the oval located on both ends of the Odor Eater™. Remove old cartridge from mounting bracket.
2. Place new cartridge (Perko Part No. 0686DP0CART) into mounting bracket.
3. Reconnect the Odor Eater™ to the vent line by aligning the quick connectors and pushing onto the cartridge. Ensure each connection clicks securely in place.
4. Regularly inspect the Odor Eater™ connectors for signs of wear or damage. Replace as necessary.

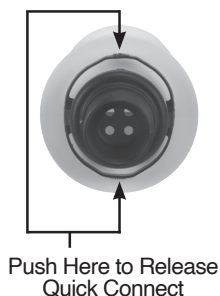


Quick Connectors and Hose Adapters:

If you need replacement quick connects or hose adapters, order fitting kit, Perko Part No. 0686DP0CON.


Mounting Bracket Dimensions (top view)

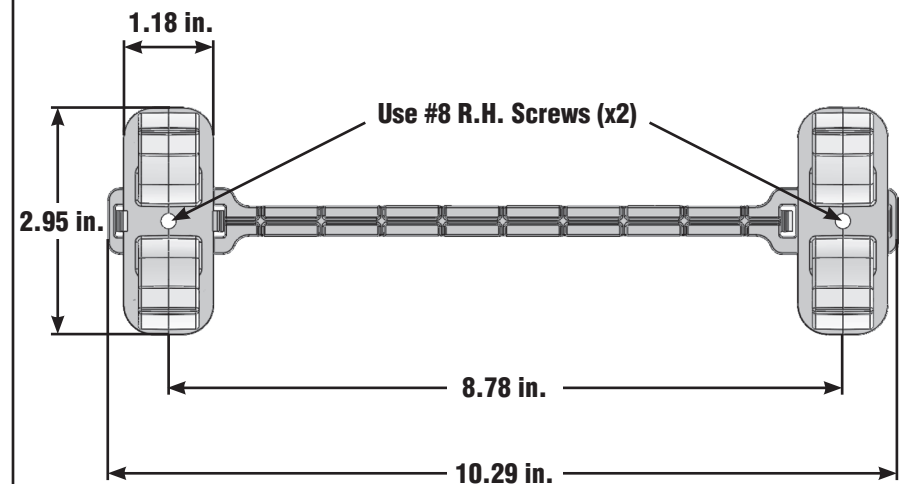

Kit Contents

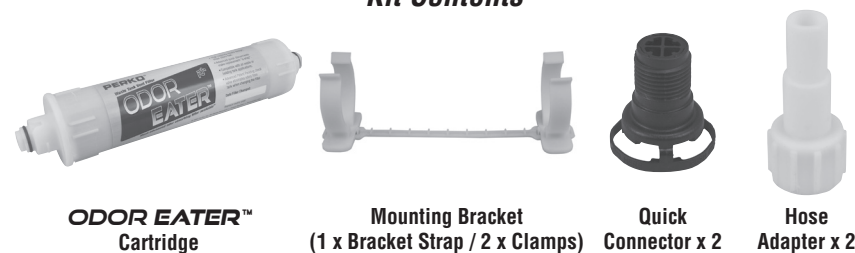

Typical Waste System Diagram

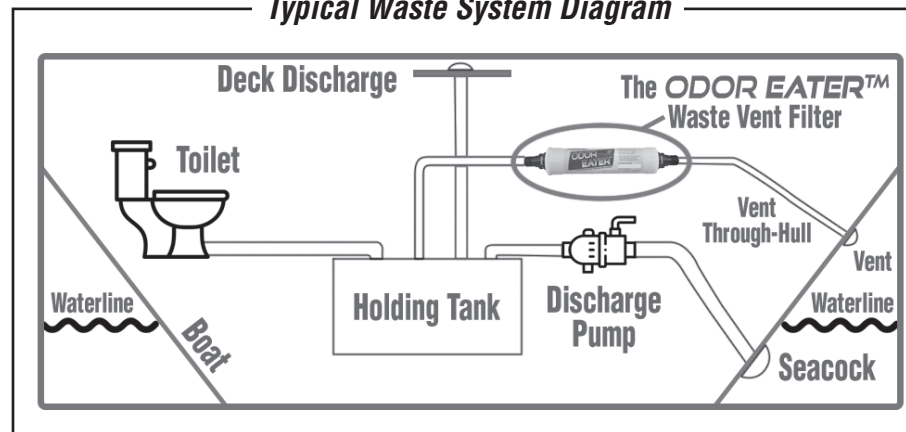

PERKO Odor Eater™
ONE YEAR LIMITED WARRANTY

PERKO, INC. (PERKO) warrants to the original consumer-purchaser that PERKO'S consumer products will be free from defective materials or workmanship for a period of **one (1) year** from the original purchase date. Products installed as original equipment by a boat builder or manufacturer are limited to one (1) year or the duration of the manufacturer's general accessory warranty, whichever is longer.

ALL IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY, ARE ALSO LIMITED IN DURATION TO THE ONE YEAR PERIOD FROM THE ORIGINAL PURCHASE DATE.

PERKO SHALL NOT BE LIABLE FOR LOSS OF USE OF ANY OF ITS CONSUMER PRODUCTS, NOR FOR OTHER INCIDENTAL OR CONSEQUENTIAL COSTS, EXPENSES, OR DAMAGES INCURRED BY THE ORIGINAL CONSUMER-PURCHASER OR BY ANY OTHER PERSON.

SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY OR MAY NOT APPLY TO YOU. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY OR MAY NOT APPLY TO YOU.

This warranty is void if the consumer product warranted has been damaged by accident or unreasonable use, neglect, improper service or other cause not arising out of defects in material or workmanship. Excluded from this warranty are Electric Light Bulbs (lamps), Sealed Beam Units and Fuses.

This warranty is void if the Odor Eater™ cartridge is subject to water, seawater, or waste water inside the cartridge damaging the unit. In the event of such damage the product cannot be repaired, dried or treated, and must be replaced.

During the warranty period, your PERKO product will either be repaired or it will be replaced with a like product (at PERKO's option) without charge to the original consumer-purchaser, when returned prepaid and insured, with proof-of-purchase date to PERKO at the address shown below. In the event of replacement, the replacement product will continue the warranty of the original product, or ninety (90) days, whichever is longer.

PERKO does not authorize any person or company to create for it any other obligation or liability in connection with any of its products.

PERKO, INC. • 16490 N.W. 13TH AVENUE • MIAMI, FL 33169-5707

PERKO®

We Make it Right, Right Here!!®

Fig. No. 0686DP0KIT & 0686000KIT



Waste Tank Vent Filter
INSTALLATION & OPERATING INSTRUCTIONS



5/25
0686INS1

PERKO, Inc.
16490 N.W. 13th Avenue
Miami, FL 33169-5707
www.perko.com