

MOUNTING INSTRUCTIONS

These Rim Latch Sets are designed to be mounted with the Cup Style Latch either flush or on the surface of doors 3/4 to 1-1/8 inches thick.


FLUSH MOUNT (Exploded View #1)

1. Cut out template below. Fold on dotted line. Place on door at desired height on side for cup latch. Folded tab should overlap edge.
2. Mark center of circles for drilling.
3. a. Drill a 2 inch diameter hole that is 5/16 inch deep (counterbore).
b. Drill a 9/16 inch diameter hole through the center.
4. Discard black plastic ring (surface mount adapter). Mount cup in 2 inch hole. Insert "D" handle with stem through hole in cup. Place rim latch over square stem on opposite side of door and mount. Install lever handle.
5. Mount strike (flush or box type) on door frame.


SURFACE MOUNT (Exploded View #2)

1. Cut out template below. Fold on dotted line. Place on door at desired height on side for cup latch. Folded tab should overlap edge.
2. Mark center of circles for drilling.
3. Drill a 9/16 inch hole.
4. Mount cup with surface mount adapter on door. Insert "D" handle with stem through hole in cup. Place rim latch over square stem on opposite side of door and mount. Install lever handle and lock in position with set screw.
5. Mount strike (flush or box type) on door frame.

MOUNTING TEMPLATE

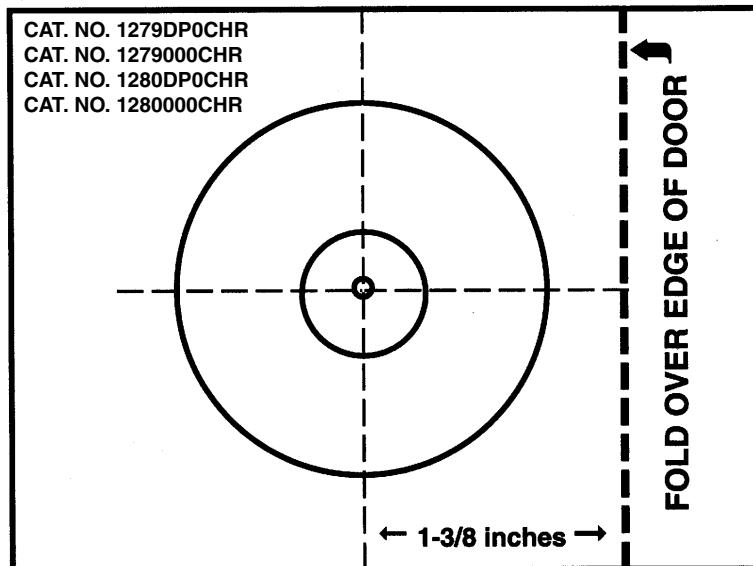

EXPLODED VIEW #1

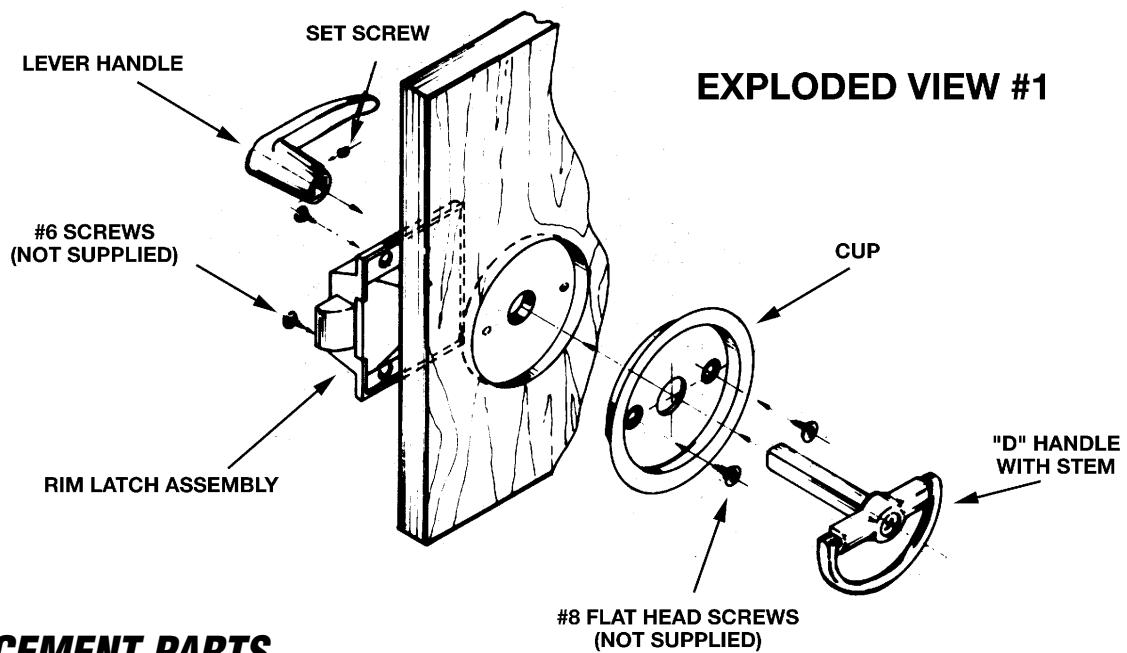

REPLACEMENT PARTS

ITEM	CATALOG NUMBER	
LEVER HANDLE		
RIM LATCH ASSEMBLY	FOR 1279000CHR	092800088B
	FOR 1280000CHR	093000088B
"D" HANDLE WITH STEM		
BEVEL WITH CAM (STRIKE)	FOR 1279000CHR	0984000CHR
	FOR 1280000CHR	0920000CHR
STRIKE PLATE (NOT SHOWN)	FOR 1279000CHR	0976000CHR
	FOR 1280000CHR	0912000CHR

EXPLODED VIEW #2

