

The above lights are certified for use on power driven vessels 20 meters (65.6 ft.) to 50 meters (164.0 ft.) in length operating on a nominal 12 volt system (see bulb data chart below for selection of proper bulb). In order to comply with the '72 COLREGS and the U.S. Inland Navigation Rules, the following must be adhered to:

MOUNTING INFORMATION


Read all instructions before proceeding.

- 1). For proper light selection, positioning and configuration, refer to A.B.Y.C. Standard A-16*, the '72 COLREGS, and the U.S. Inland Navigation Rules*.
- 2). These lights are designed to be mounted on a vertical surface. The mounting surface for Cat. No. 0005 Series Masthead Lights and Cat. No. 0007 Series Stern and Towing Lights must be perpendicular to the fore-aft centerline of the boat and facing in the proper direction. The mounting surface for Cat. No. 0004 Series Side Lights must be parallel to the fore-aft centerline of the boat. (See Diagram).
- 3). Draw one 2 inch long horizontal reference line at the selected mounting location. Then draw two vertical lines, 25/32 inch apart, each intersecting the line at right angles.
- 4). Drill to accommodate #10 screws at each of the two line intersections created above.
- 5). Attach supply connections to the light, making sure to wire in accordance with both A.B.Y.C. Standard E-9* and U.S. Coast Guard Safety Standards for Boat Electrical Systems (33 CFR 183)*
- 6). Mount the light.

* The above referenced standards can be obtained from:

- | | |
|--|--|
| <p>(1) American Boat & Yacht Council, Inc
 613 Third Street, Suite 10
 Annapolis, MD 21403</p> | <p>(2) U.S. Coast Guard
 Washington, D.C. 20593
 (or your local C.G. Office)</p> |
|--|--|

DIAGRAM

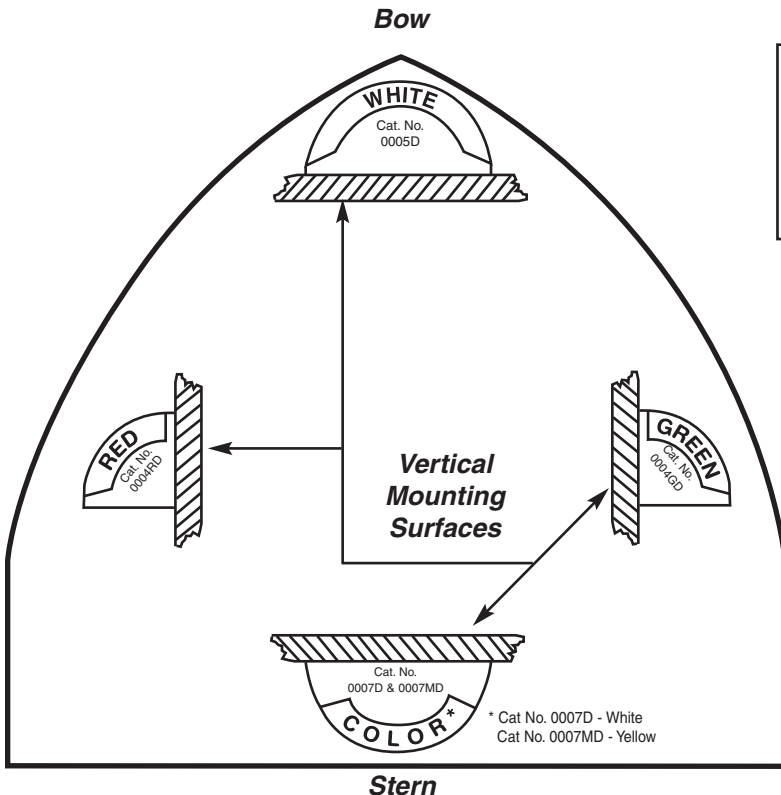

Catalog Numbers	Color/Description	Visibility Miles	Required Bulb
0004GD3XXX	Green Side Light	2	0373002CLR
0004RD3XXX	Red Side Light	2	0373003CLR
0005D03XXX	White Masthead Light	5	0373005CLR
0007D03XXX	White Stern Light	2	0373001CLR
0007MD3XXX	Yellow Towing Light	2	0373002CLR

NOTE: To complete the above listed catalog numbers, replace the XXX with the following finish designations:
 CHR = Chrome Plated Brass ex. 0004D03CHR
 GAL = Galvanized Steel ex. 0004D03GAL
 POL = Polished Brass ex. 0004D03POL

* Cat No. 0007D - White
 Cat No. 0007MD - Yellow



NAVIGATION LIGHT CERTIFICATE OF COMPLIANCE

This navigation light has been tested and classified by UNDERWRITERS' LABORATORIES, INC. (UL) in accordance with the '72 COLREGS and the U.S. INLAND NAVIGATION RULES ACT OF 1980. When properly installed, and fitted with the correct lamp, this light is approved by the U.S. Coast Guard for use aboard U.S. Coast Guard inspected vessels. This certification is also accepted by other inspecting authorities. An identification plate attached to the light provides lamp replacement and official certification information.

Upon installation, record information below from the identification plate, as applicable to the class of vessel on which the light is to be fitted.

Type of Light _____
(Side Light, Masthead Light, Stern Light, Etc.)

Cat. No. _____
(0004RD3GAL, 0005D03PLB, 0007D03GAL, Etc.)

D.O.M. No. _____
(Die Stamped)

Vessel Length _____
(20 to 50 meters)

Replacement Lamp _____
(Cat. No. of Lamp)

Date of Installation _____

Vessel Identification _____

PERKO, INC.
16490 N.W. 13th Avenue
Miami, FL 33169-5707